



Turn CW to raise CUT ON & OFF pressure

Turn CW to raise OFF pressure

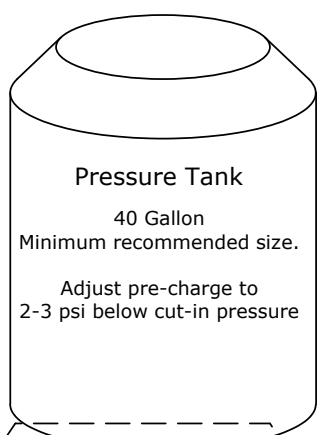


Pressure Tank
40 Gallon
Minimum recommended size.
Adjust pre-charge to 2-3 psi below cut-in pressure

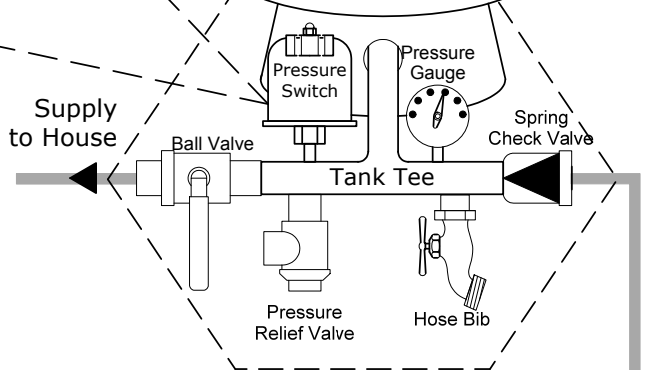

PS Controller

L1/L2/L3 must match the numbers on pump leads.
Other combinations may cause reverse rotation!!


For wire size, refer to ETAPUMP Sizing Table.

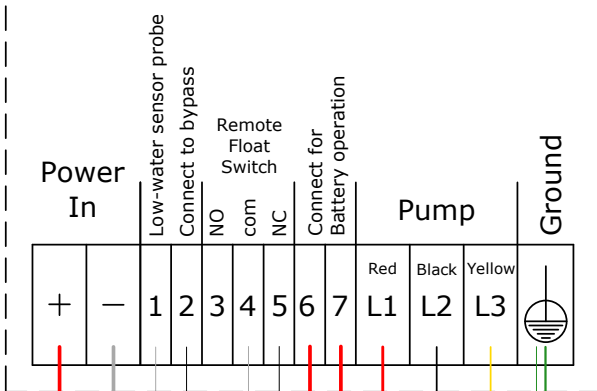

Battery Power--
Protect with 20 amp fuse or disconnect

If not using Low Water Probe,
Jumper Terminals 1 and 2

Grounding Electrode System

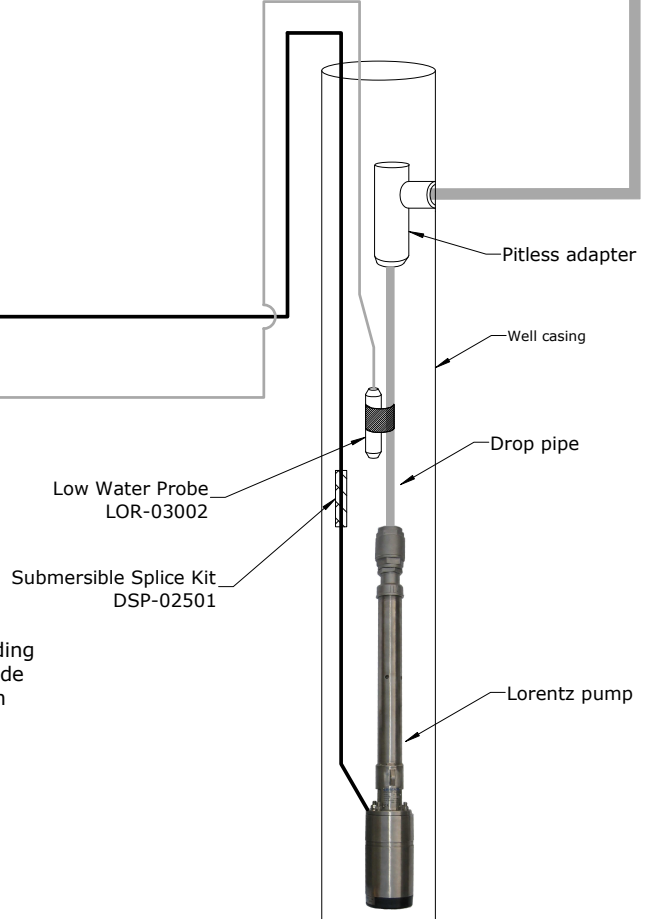

Solar Power & Pump Co.
Elk City, OK
580-225-1704
1-866-246-7652