



SUNROTOR[®]
Solar Products
www.sunrotor.com

SunRotor-4 GPM

Helical Rotor Technology

Lift up to 150 ft.


Max flow rate up to 4.0 GPM

Voltage: 24 V Nominal

Power: 130/170 Watts

Pump Diameter: 3"

SRP-4-150-24

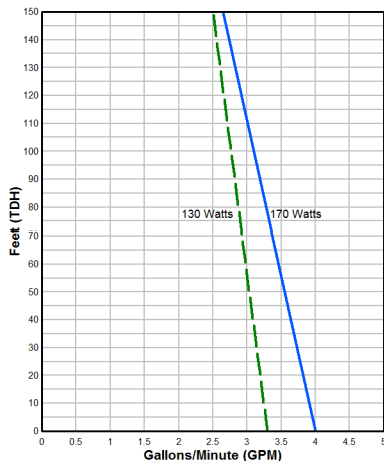

SunRotor-6 GPM

Helical Rotor Technology

Lift up to 200 ft.


Max flow rate up to 6.0 GPM

Voltage: 36-48 V Nominal

Power: 195/255/405 Watts

Pump Diameter: 3"

SRP-6-200-36

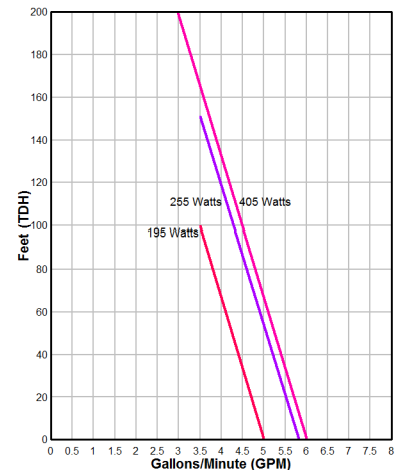

- ✓ Helical rotor pumps have only one moving part for long term reliability
- ✓ All electronics are above ground, accessible for easy repair or replacement
- ✓ Adjustable speed control for optimum flow rate
- ✓ Protected for overload, reverse polarity, and high temperatures
- ✓ Positive displacement pump system ensures water flow at even low solar power levels
- ✓ Controller prewired for either solar-only or solar-with-battery-system operation
- ✓ In battery mode controller has low voltage disconnect until battery recharge is complete